

NEO 2.5 INSERT

WOOD INSERT FOR MEDIUM TO LARGE SPACES


Heat Output Cord Wood

80,000 BTU

32,600 BTU EPA Test Fuel

EFFICIENCY (LHV)	80.3%
EFFICIENCY (B415)	74%
EMISSIONS	2.9 GM/HR.
LOG SIZE (MAX)	18 IN.
FIREBOX SIZE	2.5 CU.FT.
GLASS SIZE	166 SQ.IN.
WEIGHT	420 LBS.

Transform an energy-wasting fireplace into a cost-saving source of heat without sacrificing the comfort and appeal of a wood fire. The Neo 2.5 wood insert accommodates larger existing masonry fireplace and features Pacific Energy's trusted industry leading construction, boost air for easy lighting and one-lever air control for simple operation and burning efficiency. With all the features of the Neo 1.6 in a larger, higher-output format, the Neo 2.5 insert delivers exceptional performance and durability.

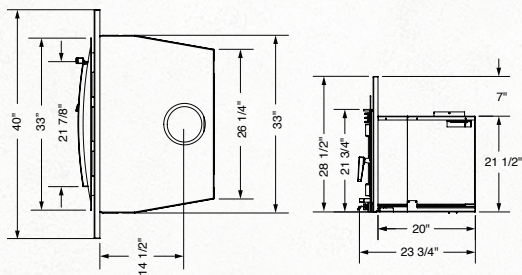

METALLIC BLACK



BRUSHED STAINLESS

STANDARD FEATURES

- EPA Certified
- Reliable, durable non-catalytic technology
- Air wash system for super clean ceramic glass
- High-tech multi-port combustion air injection system
- Inside and outside combustion air capable
- Floating firebox for extended stove life
- Rich Metallic Black finish
- 304 Stainless Steel Baffle, insulation cover, rails and flame shield
- Boost air for easy lighting
- Extended Burn Technology (EBT2)
- Two 80 cfm temperature-actuated variable-speed blower

- Single-Lever Air Control
- Removable flue collar for ease of installation
- East-West loading
- Integrated Heat Exchanger

DESIGN OPTIONS

- Contemporary Surround in Metallic Black or Stainless Steel (40" x 28")
- Oversize Surround (48" x 32")

MINIMUM FIREBOX OPENING

- Min. Fireplace Opening Front Width 34"
- Min. Fireplace Opening Front Height 22"
- Min. Fireplace Opening Front Depth 20"



AVAILABLE SURROUNDS



METALLIC BLACK



BRUSHED STAINLESS STEEL

For reference only. Installations should be based on installation manuals. Specifications subject to change.