

SUPER INSERT

INSERT FOR MEDIUM SPACES


Heat Output Cord Wood

72,000 BTU

34,600 BTU EPA Test Fuel

EFFICIENCY (LHV)	81.5%
EMISSIONS	3.4 GM/HR.
LOG SIZE (MAX)	18 IN.
FIREBOX SIZE	2.1 CU.FT.
GLASS SIZE	122 SQ.IN.
WEIGHT	345 LBS.

The Super Insert offers same great features and performance of the Pacific Insert but with a more refined look and designed to fit tighter fireplaces. The Super Insert, with its large ceramic glass door, gives you the full comfort and view of your log fire. Transform your drafty fireplace into an easy-to-light, easy-to-load reliable source of heat with the convenience of one-touch adjustable temperature control.

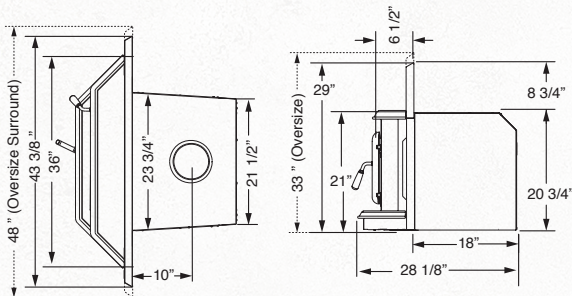

STANDARD FEATURES

- EPA Certified
- Reliable, durable non-catalytic technology
- Single-Lever Air Control
- Air wash system for super clean ceramic glass
- High-tech multi-port combustion air injection system
- Inside and outside combustion air capable
- Floating firebox for extended stove life
- Rich Metallic Black finish
- 304 Stainless Steel Baffle, insulation cover, rails and flame shield
- Two 80 cfm temperature-actuated variable speed blowers
- Boost air for easy lighting

DESIGN OPTIONS

- Arched door in four finishes
- Embossed Surround, Standard Size (43" x 29")
- Embossed Surround, Oversize (48" x 33")
- Flat Surround, Oversize (48" x 33")



For reference only. Installations should be based on installation manuals. Specifications subject to change.